
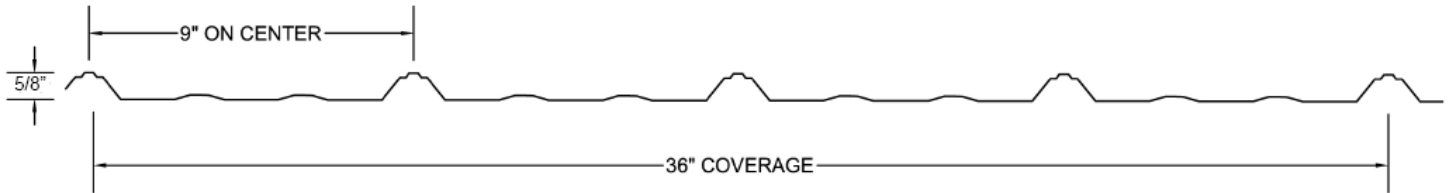


TOUGH RIB PROFILE

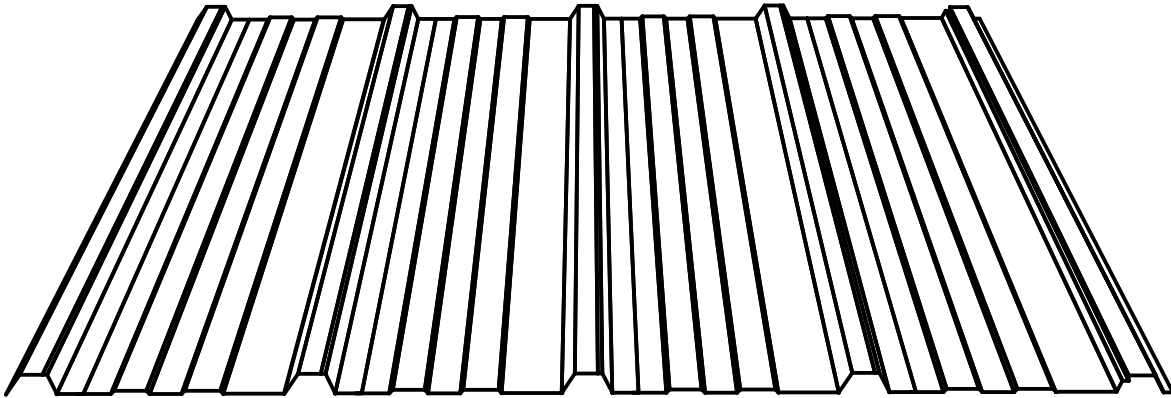

The Tough Rib panel covers 36" and is composed of five major ribs at 5/8" tall and 9" on center. The major ribs have a minor rib to add rigidity while the stiffener ribs between the major ribs are symmetrical with the flat areas to provide an attractive appearance. The Tough Rib panel is available in both galvanized and pre-painted galvanized steel. All material conforms to ASTM A-446 Grade E (80,000 lb. yield strength). The paint coating on the Tough Rib panel is a durable baked on silicone modified polyester (SMP) finish.

Notes:

1. Allowable loads are for uniform load on 3 spans simultaneously

29 ga	LIVE LOAD				UPLIFT LOAD			
	2'-0"	3'-0"	4'-0"	5'-0"	2'-0"	3'-0"	4'-0"	5'-0"
Simple Span	90	40	17	9	90	53	30	19
Continuous Span	86	57	32	16	86	57	37	24

29 GAUGE STEEL COLORS:

- | | | | | |
|--------------|------------|------------------|------------|--------------|
| White | Light Gray | Light Stone | Ocean Blue | Denali Green |
| Zincalume | Dark Gray | Dark Brown | Tahoe Blue | Evergreen |
| Copper Penny | Black | Medium Brown | Brick Red | Forest Green |
| | | Weathered Copper | | |

Magic Metals, Inc. 530 E Steel Loop, Palmer, AK 99645
 Phone: (800)478-6242 or (907)746-7800 Fax: (907)746-7800
 magicmetals@mtaonline.net
 www.magicmetalsinc.com

