


NORSTAR PROFILE

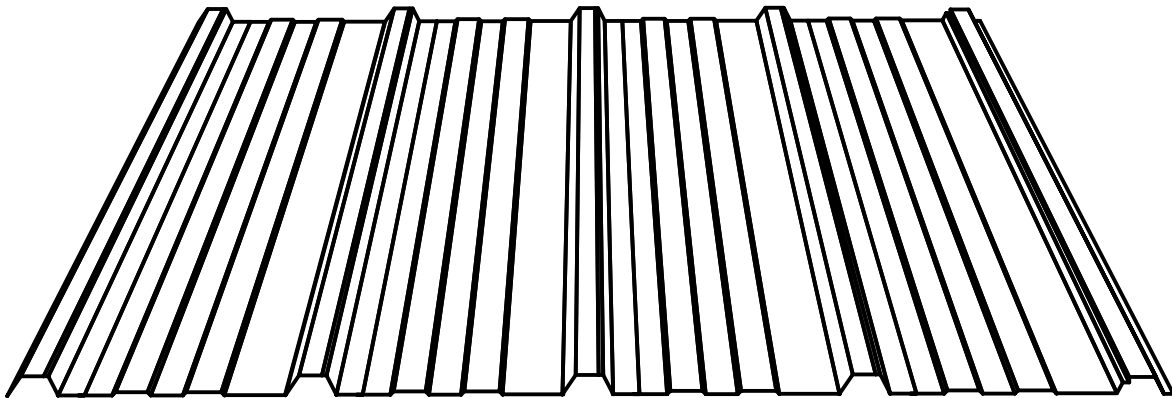

NorStar panel covers 36" and is composed of five major ribs, 9" on center and 5/8" high. The stiffener ribs between the major ribs are symmetrical with the flat areas to provide an attractive appearance. NorStar panel is available in both galvanized and pre-painted galvanized steel. The paint coating on the NorStar panel is a high quality SMP (Silicone Modified Polyester) finish.

Notes:

1. Allowable loads are for uniform load on 3 spans simultaneously

Live Load

Uplift Load

	Live Load				Uplift Load			
29 ga	2'-0"	3'-0"	4'-0"	5'-0"	2'-0"	3'-0"	4'-0"	5'-0"
Simple Span	90	40	17	9	90	53	30	19
Continuous Span	86	57	32	16	86	57	37	24

Available in 29 ga steel in these colors:

- | | | | |
|------------------|--------------|--------------|-----------|
| White | Dark Brown | Dark Gray | Black |
| Light Stone | Brick Red | Evergreen | Zincalume |
| Medium Brown | Copper Penny | Forest Green | |
| Weathered Copper | Light Gray | Ocean Blue | |

530 E Steel Loop Palmer, AK 99645
 (907) 746-7800 (907) 746-7802 Fax 1-800-478-6242
 Visit us online at www.magicmetalsinc.com

